




PRODUCT OVERVIEW



GEAR REDUCERS | GEARMOTORS | ELECTRIC MOTORS | MOTION CONTROL

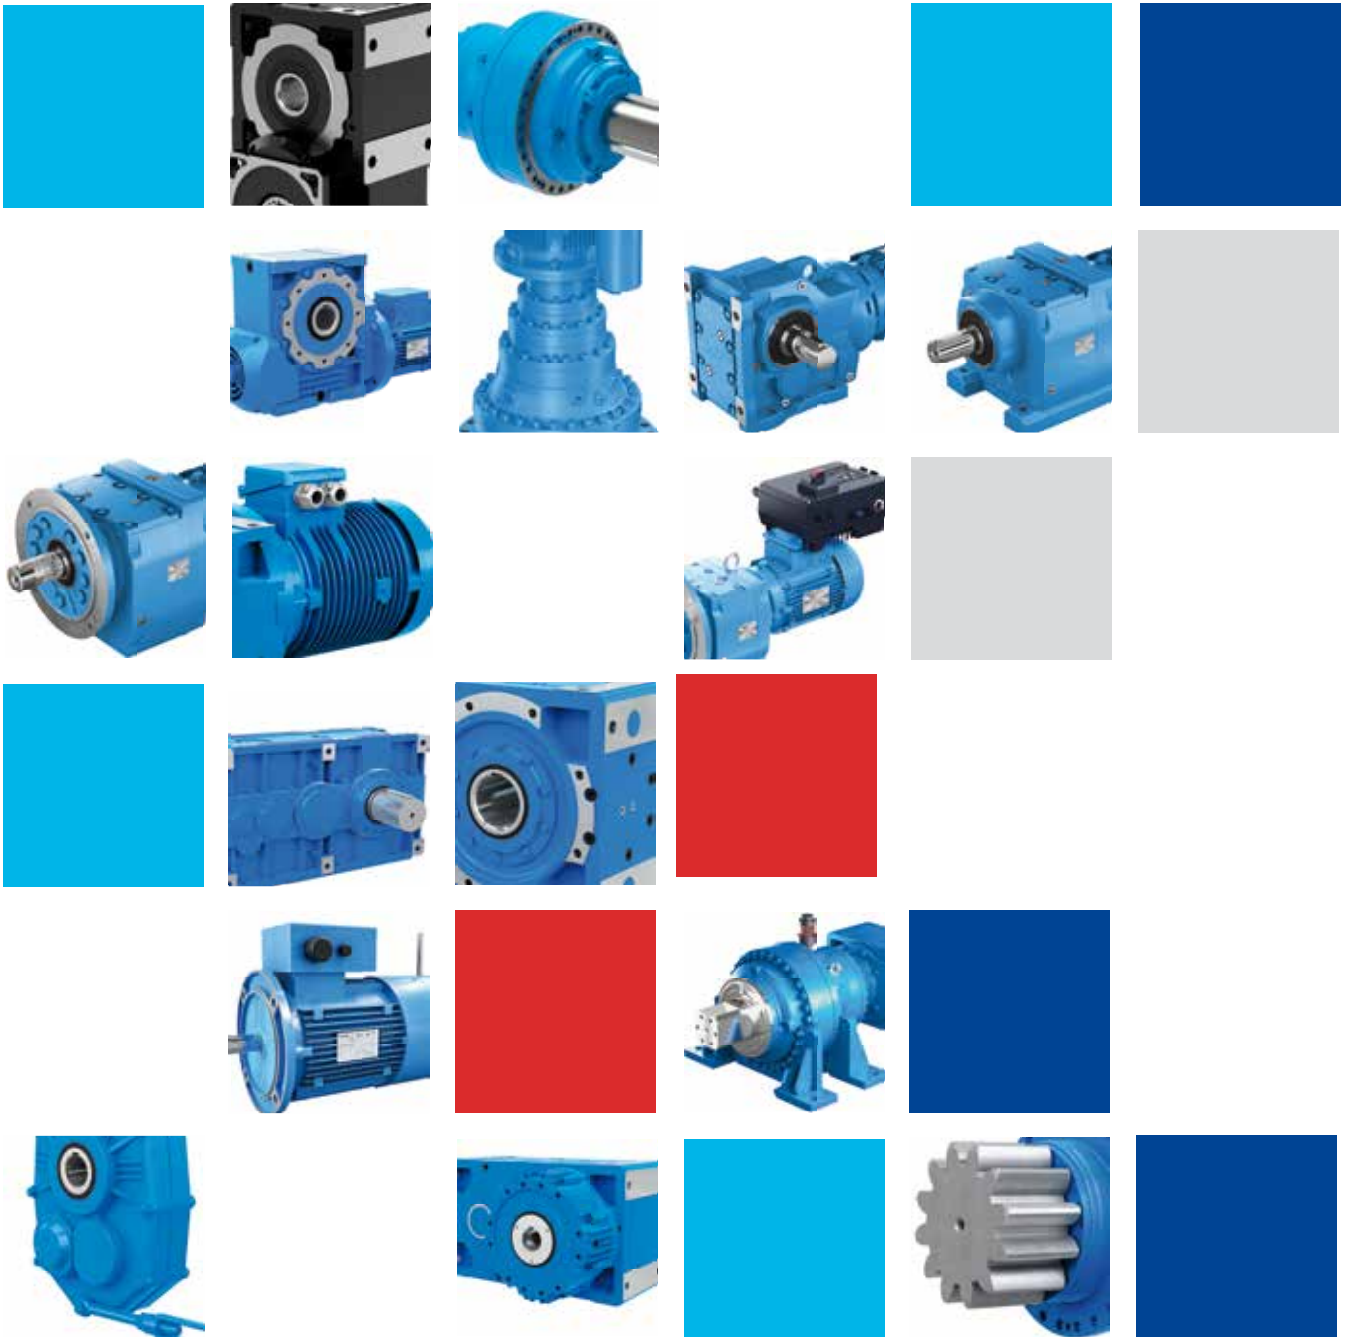


Solutions for an evolving industry


In the global marketplace, our customers, investors, partners value our products and services for two reasons: excellence and reliability. At Rossi we utilize change as a strategic lever for our growth. "Solutions for an evolving industry"


fully expresses our corporate philosophy: We are a flexible and dynamic reality, able to satisfy all requirements of a continuously evolving industrial world, thanks to our innovative solutions.

- Cutting-edge manufacturing
- Specialized housing machining
- Extensive systematic controls
- Experience and know-how
- Excellence and innovation
- Reliable customer support.

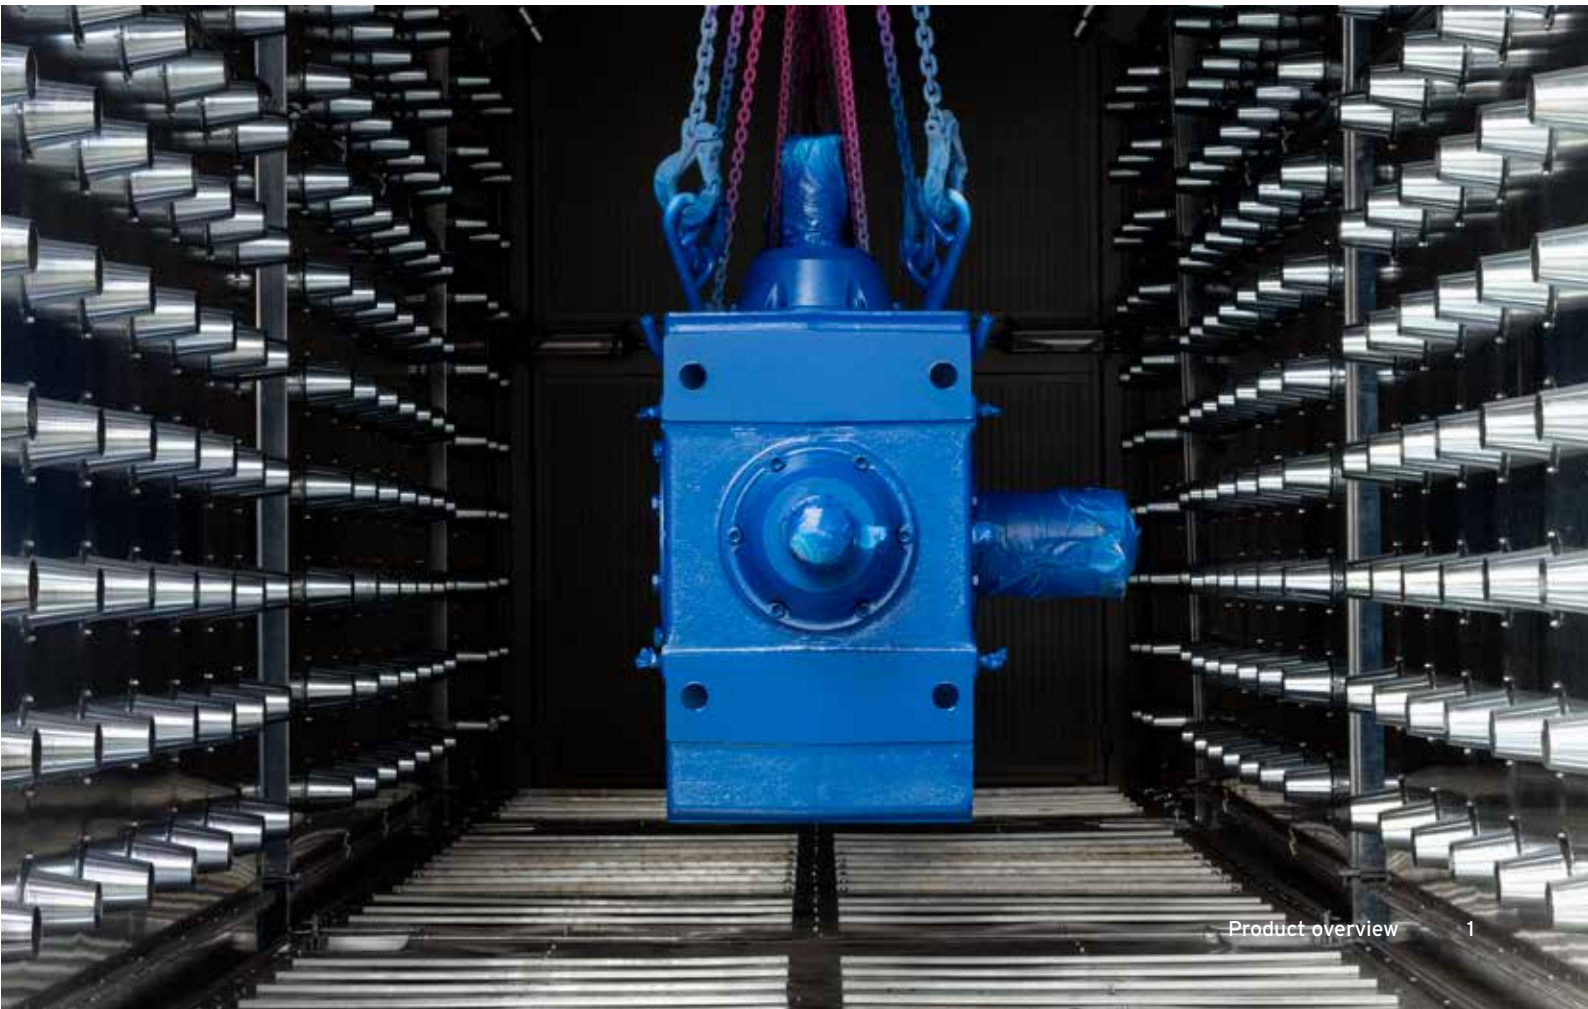

Product range

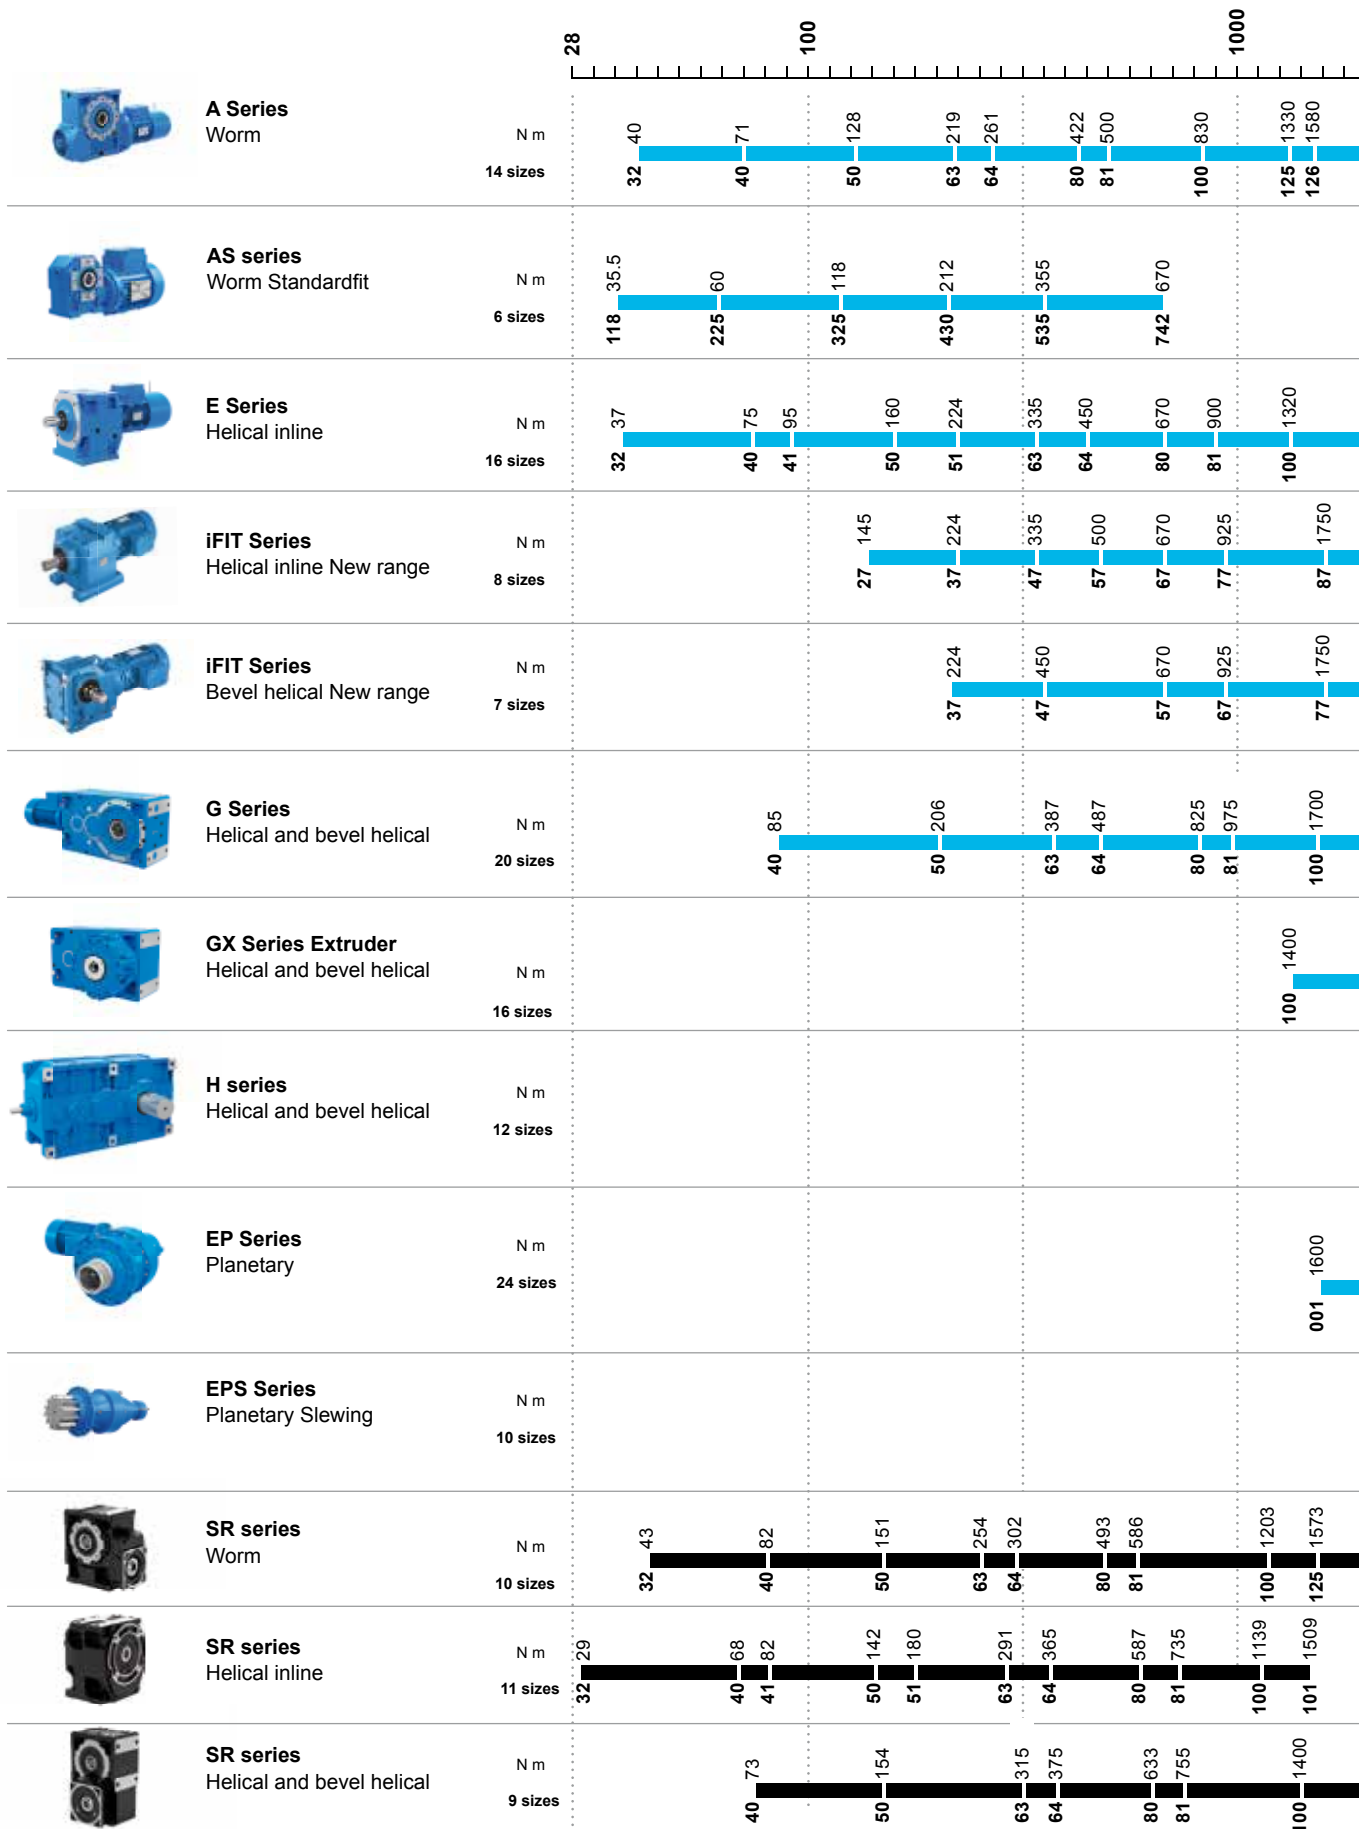

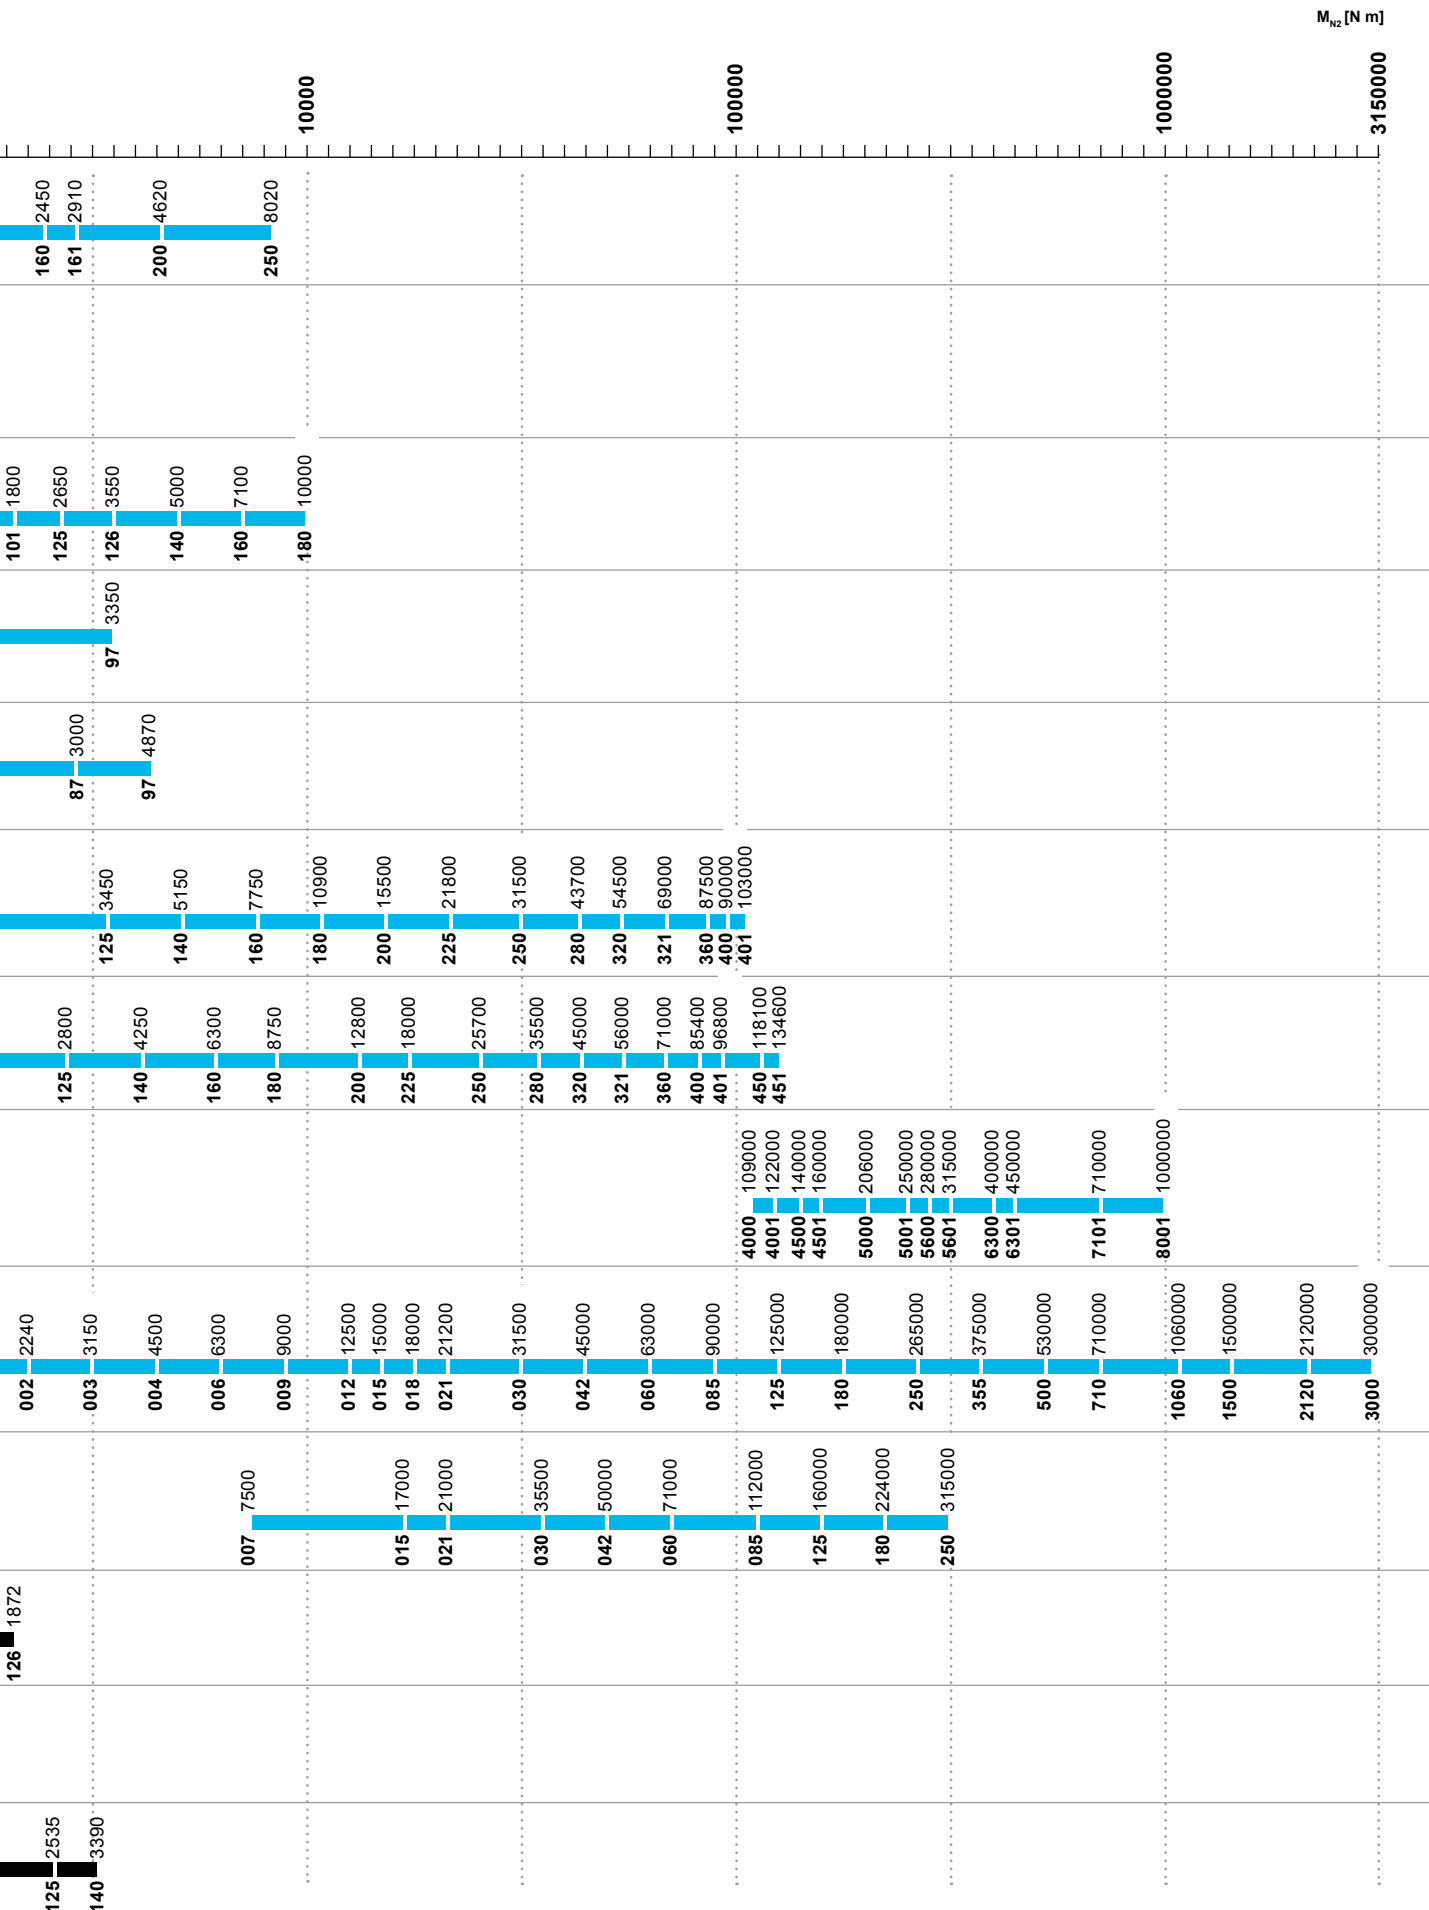



A Series

Worm gear reducers & gearmotors

Features

- Universal mounting with lower feet integral on the housing and B14 flanges
- Rigid and precise cast iron monobloc housing
- Forced ventilation for an easy thermal power dissipation (size ≥ 100)
- Worm wheels made of nickel bronze with controlled phosphor content to achieve improved performance, a higher load capacity, greater reliability and wear resistance
- Higher worm efficiency
- Wide range of accessories and non-standard designs

Benefits

- Longer life and lower power consumption
- Easy and functional shaft mounting
- High performance and greater reliability
- Smooth and precise running, reduced and constant backlash
- Constant performance in heavy duty applications



AS Standardfit Series

Worm gearmotors

Features

- Mounting with lower integral feet and B14 flanges on 2 faces integral on the housing
- Rigid and precise cast iron monobloc housing
- Worm wheels made of nickel bronze with controlled phosphor content to achieve improved performance, a higher load capacity, greater reliability and wear resistance
- Generous internal space between train of gears and housing
- Tapered roller bearings on worm shaft
- Motor mounting flange integral to the housing
- Higher worm efficiency

Benefits

- Longer life and lower power consumption
- Interchangeability with major manufacturers
- High performance and greater reliability
- Smooth and quiet running

14 sizes 32 ... 250

Nominal torque (M_{N2}) up to 8.020 N m

Transmission ratio (i_N) 7 ... 16.000

| Size | Torque [N m] |
|-------|--------------|
| A 32 | 40 |
| A 40 | 71 |
| A 50 | 128 |
| A 63 | 219 |
| A 64 | 261 |
| A 80 | 422 |
| A 81 | 500 |
| A 100 | 830 |
| A 125 | 1.330 |
| A 126 | 1.580 |
| A 160 | 2.450 |
| A 161 | 2.910 |
| A 200 | 4.620 |
| A 250 | 8.020 |

6 sizes 118 ... 742

Nominal torque (M_{N2}) up to 670 N m

Transmission ratio (i_N) 6 ... 75

| Size | Torque [N m] |
|--------|--------------|
| AS 118 | 35.5 |
| AS 225 | 60 |
| AS 325 | 118 |
| AS 430 | 212 |
| AS 535 | 355 |
| AS 742 | 670 |



E Series

Coaxial gear reducers & gearmotors

Features

- Universal mounting with lower/upper feet and B5 flange integral to the housing
- Rigid and precise cast iron monobloc housing
- Helical toothed gear pairs with ground profile
- Wide range of sizes
- Final stage pinion with 3 bearings for increased torque capacity

Benefits

- Longer life
- Minimum maintenance requirements
- High performance and greater reliability
- Strength and reliability for heavy duty applications

16 sizes 32 ... 180

Nominal torque (M_{N2}) up to 10.000 N m

Transmission ratio (i_N) 4 ... 6.300

| Size | Torque [N m] |
|-------|--------------|
| E 32 | 37 |
| E 40 | 75 |
| E 41 | 95 |
| E 50 | 160 |
| E 51 | 224 |
| E 63 | 335 |
| E 64 | 450 |
| E 80 | 670 |
| E 81 | 900 |
| E 100 | 1.320 |
| E 101 | 1.800 |
| E 125 | 2.650 |
| E 126 | 3.550 |
| E 140 | 5.000 |
| E 160 | 7.100 |
| E 180 | 10.000 |

Helical inline & bevel helical gearmotors



iFIT Series
Helical inline gearmotors

8 sizes iC 27 ... iC 97

Nominal torque (M_{N2}) up to 3.350 N m

Transmission ratio (i_N) 3,4 ... 290

| Size | Torque [N m] |
|-------|--------------|
| iC 27 | 145 |
| iC 37 | 224 |
| iC 47 | 335 |
| iC 57 | 500 |
| iC 67 | 670 |
| iC 77 | 925 |
| iC 87 | 1.750 |
| iC 97 | 3.350 |



iFIT Series
Bevel helical gearmotors

7 sizes iO 37 ... iO 97

Nominal torque (M_{N2}) up to 4.870 N m

Transmission ratio (i_N) 5,4 ... 197

| Size | Torque [N m] |
|-------|--------------|
| iO 37 | 224 |
| iO 47 | 450 |
| iO 57 | 670 |
| iO 67 | 925 |
| iO 77 | 1.750 |
| iO 87 | 3.000 |
| iO 97 | 4.870 |

Features

- Fully interchangeable with market standards
- Made in Europe
- Full range with robust cast iron housing
- Gear precision as per DIN/ISO 6 or better
- New IE2, IE3 compact electric motors
- High quality sealing solutions
- Round shaped, smooth housing surface
- Higher torque

Benefits

- "Plug & Play" with no re-engineering costs
- Superior quality, minimum maintenance
- High performance and reliability: minimum deformation, no gearing misalignment, no vibration, and low noise level
- Energy saving, low noise level, reduced backlash
- Premium efficiency, long lifetime and no oil leakage
- Wash down capability. Better hygiene
- Up to 12% torque higher than market standard

Parallel shaft helical gearmotors



iFIT Series
Parallel shaft helical gearmotors

8 sizes iP 27 ... iP 97
Nominal torque (M_{N2}) up to 4.870 N m
Transmission ratio (i_N) 3,77 ... 281,71

| Size | Torque [N m] |
|-------|--------------|
| iP 27 | 145 |
| iP 37 | 224 |
| iP 47 | 450 |
| iP 57 | 670 |
| iP 67 | 925 |
| iP 77 | 1.700 |
| iP 87 | 3.350 |
| iP 97 | 4.870 |

Coming soon...

The **i**nnovative, **i**nternational, **i**nterchangeable gearmotors designed for a world in motion

PACKAGING

CONSTRUCTION

WASTE & WATER TREATMENT

INTRALOGISTICS HANDLING

FOOD & BEVERAGE

READY TO FIT YOUR NEEDS



G Series Helical & bevel helical gear reducers & gearmotors

Features

- Universal symmetrical cast iron housing suited for horizontal and vertical mounting having integral feet with housing on 4 faces and 2 faces B14
- Single piece housing for high structural stiffness
- Wide range of sizes, train of gears solutions and non-standard designs
- Suitable to be equipped with large NEMA & IEC motors
- Extended input-output center distance housing for U-layout
- Case hardened and hardened gear pairs
- Helical gear pairs with ground profile
- GLEASON spiral bevel gear pairs with ground profile

Benefits

- Easy and functional shaft-mounting design
- Minimum maintenance requirements
- High performance and greater reliability
- Strength and reliability for heavy duty applications

20 sizes 40 ... 401

Nominal torque (M_{N2}) up to 103.000 N m

Transmission ratio (i_N) 2 ... 160

| Size | Torque [N m] |
|-------|--------------|
| G 40 | 85 |
| G 50 | 206 |
| G 63 | 387 |
| G 64 | 487 |
| G 80 | 825 |
| G 81 | 975 |
| G 100 | 1.700 |
| G 125 | 3.450 |
| G 140 | 5.150 |
| G 160 | 7.750 |
| G 180 | 10.900 |
| G 200 | 15.500 |
| G 225 | 21.800 |
| G 250 | 31.500 |
| G 280 | 43.700 |
| G 320 | 54.500 |
| G 321 | 69.000 |
| G 360 | 87.500 |
| G 400 | 90.000 |
| G 401 | 103.000 |



GX Series Helical and Bevel Helical for extruder design

Excellent specific series for extruders with the same Features and Benefits of G series

Additional Features

- Extruder support conceived for normal and heavy applications
- Optional extended input-output center distance housing for U-layout

16 sizes 100 ... 451

Nominal torque (M_{N2}) up to 134.600 N m

Transmission ratio (i_N) 6,3 ... 28

| Size | Torque [N m] |
|--------|--------------|
| GX 100 | 1.400 |
| GX 125 | 2.800 |
| GX 140 | 4.250 |
| GX 160 | 6.300 |
| GX 180 | 8.750 |
| GX 200 | 12.800 |
| GX 225 | 18.000 |
| GX 250 | 25.700 |
| GX 280 | 35.500 |
| GX 320 | 45.000 |
| GX 321 | 56.000 |
| GX 360 | 71.000 |
| GX 400 | 85.400 |
| GX 401 | 96.800 |
| GX 450 | 118.100 |
| GX 451 | 134.600 |



H Series
Helical & bevel helical gear reducers

Features

- Universal spheroidal cast iron housing suited for horizontal and vertical mounting having integral feet
- Two-piece housing with stiffening ribs for high structural stiffness and high oil capacity
- 12 sizes, train of gears solutions and non-standard designs
- Helical gear units with 2 and 3 gear stages
- Bevel helical gear units with 1, 2 and 3 gear stages
- Case hardened and hardened gear pairs
- Helical gear pairs with ground profile
- GLEASON spiral bevel gear pairs with ground profile

Benefits

- One of the widest torque range from a single supplier
- Customized solutions on request starting from a standard modular design
- Short delivery times
- Optimized design for heavy industry applications

12 sizes 4.000 ... 8.001
Nominal torque (M_{N2}) up to 1.000.000 N m
Transmission ratio (i_N) 8 ... 315

| Size | Torque [N m] |
|---------|--------------|
| H 4,000 | 109.000 |
| H 4,001 | 122.000 |
| H 4,500 | 140.000 |
| H 4,501 | 160.000 |
| H 5,000 | 206.000 |
| H 5,001 | 250.000 |
| H 5,600 | 280.000 |
| H 5,601 | 315.000 |
| H 6,300 | 400.000 |
| H 6,301 | 450.000 |
| H 7,101 | 710.000 |
| H 8,001 | 1.000.000 |



G & H Series
Drive units on swing base

Features

- Customized and innovative solutions for every specific application in order to maximize cost efficiency
- Swing base structures are made of hollow profiles or beams appropriately combined, treated and machined
- Wide range of gearboxes and possible combinations with a wide range of accessories and available options
- Customer support and assistance during the design stage, fabrication and commissioning taking advantage of Rossi's long experience
- Assembly and alignment by experienced and skilled manpower
- Global qualified suppliers of components for swing base and special design assemblies

Benefits

- Supply of turn-key complete drive units
- Simplified installation at job site
- Maximum efficiency and cost effectiveness

Power (P_N)
Nominal torque (M_{N2})
Transmission ratio (i_N) } according to Customer's requirements



EP Series
Planetary gear reducers & gearmotors

Features

- 2, 3, 4 or 5 and 6 reduction stages for both coaxial and right angle units
- Modular design, with multi-optional executions
- Suitable to be equipped with NEMA, hydraulic & IEC motors
- External gear pair made of casehardened and hardened steel; internal gear made from nitride steel
- Cylindrical spur gear with ground profile and flank modification
- GLEASON spiral bevel gear pairs with ground profile
- Very compact size and reduced mass of gearbox
- Wide range of accessories and non-standard designs
- Lower backlash, enhanced stiffness and heavy duty bearing
- Improved lubrication system
- Wide range of hydraulic brakes

Benefits

- Easy and functional flange, foot, or shaft-mounting design
- High torque transmitted
- Extended range of transmission ratios and output speeds available



EPS Slewing series
Planetary Slewing drives

Excellent specific series for slewing drives with the same Features and Benefits of EP series.

Additional features

- 10 modular slew drive gear size reducers with 3 output reinforced support configurations: dual pilot flanged (R), dual pilot compact (S) and single pilot front flanged (H)

Additional benefits

- Wide choice of the drives allows always the highest performance of cost-efficient solutions
- Enable to benefit of the wider range of options of the EP industrial catalog

24 sizes 001 ... 3.000

Nominal torque (M_{N2}) up to 3.000.000 N m

Transmission ratio (i_N) 3,55 ... 3.550

| Size | Torque [N m] |
|----------|--------------|
| EP 001 | 1.600 |
| EP 002 | 2.240 |
| EP 003 | 3.150 |
| EP 004 | 4.500 |
| EP 006 | 6.300 |
| EP 009 | 9.000 |
| EP 012 | 12.500 |
| EP 015 | 15.000 |
| EP 018 | 18.000 |
| EP 021 | 21.200 |
| EP 030 | 31.500 |
| EP 042 | 45.000 |
| EP 060 | 63.000 |
| EP 085 | 90.000 |
| EP 125 | 125.000 |
| EP 180 | 180.000 |
| EP 250 | 265.000 |
| EP 355 | 375.000 |
| EP 500 | 530.000 |
| EP 710 | 710.000 |
| EP 1.060 | 1.060.000 |
| EP 1.500 | 1.500.000 |
| EP 2.120 | 2.120.000 |
| EP 3.000 | 3.000.000 |

10 sizes 007 ... 250

Nominal torque (M_{N2}) up to 315.000 N m

Transmission ratio (i_N) 12,5 ... 2.800

| Size | Torque [N m] |
|---------|--------------|
| EPS 007 | 7.500 |
| EPS 015 | 17.000 |
| EPS 021 | 21.200 |
| EPS 030 | 35.500 |
| EPS 042 | 50.000 |
| EPS 060 | 71.000 |
| EPS 085 | 112.000 |
| EPS 125 | 160.000 |
| EPS 180 | 224.000 |
| EPS 250 | 315.000 |



EP Combined Units Series

Combined planetary gear reducers & gearmotors

Features

- Planetary drives combined with other Rossi products to optimize performances on a broad spectrum of application needs
- Possible combinations with standard Rossi series using the planetary drives with worms, coaxial, helical and helical bevel drives and gearmotors

Benefits

- Easy customization to meet customer needs
- Flexibility and adaptability to specific application needs
- Interchangeability

24 sizes 001 ... 3.000

Nominal torque (M_{N2}) up to 3.000.000 N m

Transmission ratio (i_N) according to Customer's requirements

| Size | Torque [N m] |
|----------|--------------|
| EP 001 | 1.600 |
| EP 002 | 2.240 |
| EP 003 | 3.150 |
| EP 004 | 4.500 |
| EP 006 | 6.300 |
| EP 009 | 9.000 |
| EP 012 | 12.500 |
| EP 015 | 15.000 |
| EP 018 | 18.000 |
| EP 021 | 21.200 |
| EP 030 | 31.500 |
| EP 042 | 45.000 |
| EP 060 | 63.000 |
| EP 085 | 90.000 |
| EP 125 | 125.000 |
| EP 180 | 180.000 |
| EP 250 | 265.000 |
| EP 355 | 375.000 |
| EP 500 | 530.000 |
| EP 710 | 710.000 |
| EP 1.060 | 1.060.000 |
| EP 1.500 | 1.500.000 |
| EP 2.120 | 2.120.000 |
| EP 3.000 | 3.000.000 |

SR Series



Worm servo gear reducers

MR type
 7 sizes 32 ... 81
 Nominal Torque up to 586 N m
 Accelerating torque up to 747 N m
 Transmission ratio (i_N) 7 ... 239

R type
 9 sizes 40 ... 126
 Nominal Torque up to 1.872 N m
 Accelerating torque up to 2.387 N m
 Transmission ratio (i_N) 7 ... 125

| Size | Torque [N m] |
|--------|--------------|
| SR 32 | 43 |
| SR 40 | 82 |
| SR 50 | 151 |
| SR 63 | 254 |
| SR 64 | 302 |
| SR 80 | 493 |
| SR 81 | 586 |
| SR 100 | 1.203 |
| SR 125 | 1.573 |
| SR 126 | 1.872 |



Helical & bevel helical servo gear reducers

MR type
 8 sizes 40 ... 125
 Nominal Torque up to 2.535 N m
 Accelerating torque up to 3.000 N m
 Transmission ratio (i_N) 6,16 ... 139

R type
 8 sizes 50 ... 140
 Nominal Torque up to 3.390 N m
 Accelerating torque up to 4.475 N m
 Transmission ratio (i_N) 6,42 ... 127

| Size | Torque [N m] |
|--------|--------------|
| SR 40 | 73 |
| SR 50 | 154 |
| SR 63 | 315 |
| SR 64 | 375 |
| SR 80 | 633 |
| SR 81 | 755 |
| SR 100 | 1.400 |
| SR 125 | 2.535 |
| SR 140 | 3.390 |



Helical inline servo gear reducers

MR type
 11 sizes 32 ... 101
 Nominal Torque up to 1.509 N m
 Accelerating torque up to 2.000 N m
 Transmission ratio (i_N) 4 ... 154

| Size | Torque [N m] |
|--------|--------------|
| SR 32 | 29 |
| SR 40 | 68 |
| SR 41 | 82 |
| SR 50 | 142 |
| SR 51 | 180 |
| SR 63 | 291 |
| SR 64 | 365 |
| SR 80 | 587 |
| SR 81 | 735 |
| SR 100 | 1.139 |
| SR 101 | 1.509 |

MR type features

- Wide range of Servo gearboxes, designed to fit almost all servo motors found on the market
- Designed for the highest torsional stiffness and the lowest angular backlash, for the maximum torque and overhung loads
- Bush with slots and hub clamp for servomotor coupling

MR type benefits

- Enhanced dimensional compactness due to direct servomotor coupling
- The correct technical solution thanks to a comprehensive range of sizes, gear stages, transmission ratios, designs, and non-standard designs
- Widest range of possible servomotor coupling dimensions



7 sizes 80 ... 320

Nominal torque (M_{N2}) up to 5.600 N m

Transmission ratio (i_N) 1 ... 6,25

L Series

Right angle shaft gear reducers

Features

- Right angle units with multiple options of executions
- Compact size
- Rigid and durable housing of cast iron
- Several output solutions, with solid or hollow shaft

Benefits

- Low ratios available
- Capability for multiple drives synchronization
- Easy adjustment to specific applications
- High performance and reliability



7 sizes 80 ... 250

Nominal torque (M_{N2}) up to 11.200 N m

Transmission ratio (i_N) 10 ... 25

P Series

Shaft mounted gear reducers

Features

- Split housing reducers
- Simplified design, with narrow housing execution

Benefits

- Very easy maintenance, with minimal requirements
- Easy and functional shaft mounting
- Durable solution dedicated for conveyors

MOTORS

Electric motors

TX - S Series



TX Series

Premium line electric asynchronous three-phase motors and brake motors

Features

- IEC standard motors
- Protection: IP 55 standard, IP 66 *
- IE3 and IE4 Energy efficiency
- Standard and safety brake (AC. DC)
- Optional complex executions available (encoders, axial cooling, increased protection, etc.)

Benefits

- Compactness and flexibility
- Suitable for running with inverter
- Reduced environmental impact and energy saving



S Series

Heavy duty roller table motors

Features

- IEC asynchronous three-phase 4 and 6 poles motors with cage rotor. totally enclosed. without fan
- Motor cooling by natural convection over a large radiating surface area and obtained by ring fins
- Protection: IP 55 standard, IP 65 * and IP 66 *

Benefits

- Specifically designed for heavy industry. in particular roller tables and conveyor roller tables

* optional

TX Series

Sizes 63 ... 315

Power (P_N) 0,06 ... 110 kW

Polarity 2, 4, 6 poles

S Series

Sizes 112 ... 250

Power (P_N) 2,8 ... 42 kW

Polarity 4, 6 poles

- Asynchronous three-phase motors
- Asynchronous three-phase brake motors (sizes from 225 to 315 available on request)
- Asynchronous three-phase heavy duty roller table motors

| Size | P _N [kW] |
|------|---------------------|
| 63 | 0,18 |
| | 0,18 |
| 71 | 0,55 |
| | 0,55 |
| 80 | 1,1 |
| | 1,1 |
| 90 | 2,2 |
| | 2,2 |
| 100 | 3 |
| | 3 |
| 112 | 5,5 |
| | 5,5 |
| | 2,8 |
| 132 | 11 |
| | 11 |
| | 4,5 |
| 160 | 15 |
| | 15 |
| | 9,5 |
| 180 | 22 |
| | 22 |
| 200 | 30 |
| | 30 |
| | 19,5 |
| 225 | 45 |
| 250 | 55 |
| | 42 |
| 280 | 90 |
| 315 | 110 |



dDrive Inverter Series Decentralized Drive

Features

- Decentralized Frequency Inverter
- Designed for Rossi IE2, IE3 electric motors
- Aluminum Housing IP 65
- Sensorless Vector Control
- Safe Torque Off (STO)
- Configurable I/O's board and internal PLC
- A large number of field buses available
- Bluetooth Interface

Benefits

- Reduced electric cabinet dimension and cooling systems
- Compact solution of inverter, motor, and gearbox
- Suitable for hard environmental operating conditions
- No need of motor encoder for speed control
- High Safety Performance Level (up to PL E)
- Customizable to fit all different application features
- Possibility to develop your own dedicated control functions
- Easy integration with existing automation controllers
- Fast and smart inverter parametrization access

dDrive Inverter Series

Sizes A, B, C


Rec. motor rating 0,55 ... 7,5 kW

Supply Voltage 3x200V AC...480V AC


280V DC...680V DC

Rated current 1,7A...16,5A

Size Rated Powers [kW]

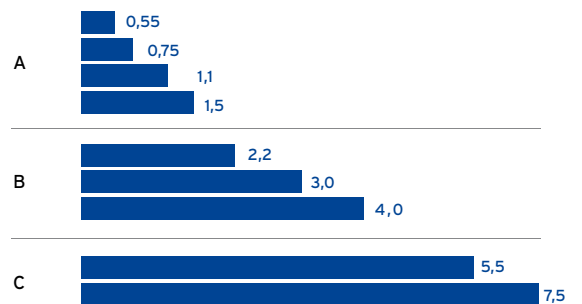

Size Rated Current (A) (@ 4 kHz)

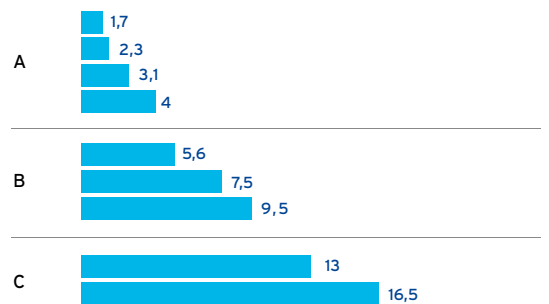

Customized solutions

Ask us whatever you need



Ship unloader drive

- Flexibility
- Reliability
- Special design
- Heavy duty

Modularity can be considered the foundation of the Rossi product line. Modular products and processes allow us to engineer a solution for most industrial applications requiring a gearmotor or gear reducer. To us, modularity means flexibility, wide range of options, faster delivery, and most important of all, competitiveness. Even more it allows to assemble in any assembly facility with almost limitless configurations allowing us to deliver solutions, regardless if it comes to supply a standard unit or an engineered one, in a cost effective manner.

This capability is made possible through our ability to understand the customer's requirements and translate the needs of that customer into a commercially and technically acceptable solution.

Of course our modular approach doesn't stop at the delivery of a product or solution. For us this is just the start, with strong online support systems our customers have access to leading interactive product and service care.

Test room drive

Features

- Project management
- Accurate selection and sizing of the components
- Precise certified alignment of the complete drive

Benefits

- Heavy customized and innovative solution to match customer requirements
- Feasibility study to find optimal solution
- Turn key drive units design
- Easy and quick installation on site

Power, nominal torque and transmission ratio according to Customer's requirements.



Our project management

Once the order is assigned, a dedicated team with skilled technicians will provide application support offering assistance and innovative solutions during the design phase.

Customer order management

We ensure that all processes within the IT platform are designed with rapid transfer of data needed for internal processes as well as for the management

of the order by the customers themselves. We have chosen to operate with Oracle's JD Edwards EnterpriseOne. This facilitates order management on one platform for both the customer and our staff anywhere in the world. Through a standard operating platform we are able to configure customers unique forecasting, shipping standards, transportation sequence and reporting processes in coordination with commercial contracts and associated quality control documentation - all integrated to one ERP system.

Total quality

Quality is about our commitment to continuously moving our company and our customers forward.

For Rossi, quality means professionalism and a proactive attitude in taking care of each individual customer. Rossi has been a pioneer in the gear industry in adopting the ISO 9001 standards, proud of its technology which has obtained major industry acknowledgments over the years. Our products comply with the main industry regulations (AGMA, GL, CTI, etc.).

Our research and development activities are stimulated by the desire to develop ever more complex electromechanical drive systems for our customers. We are committed to developing processes and products able to meet the growing demands of the modern digital age. Small incremental improvements in elements such as gear quality, housing rigidity and sealing arrangements can have a significant impact on the Total Life Cycle of the product.



Product certifications




RoHS

BUREAU VERITAS
Marine & Offshore

DNV



We have a solution for every segment

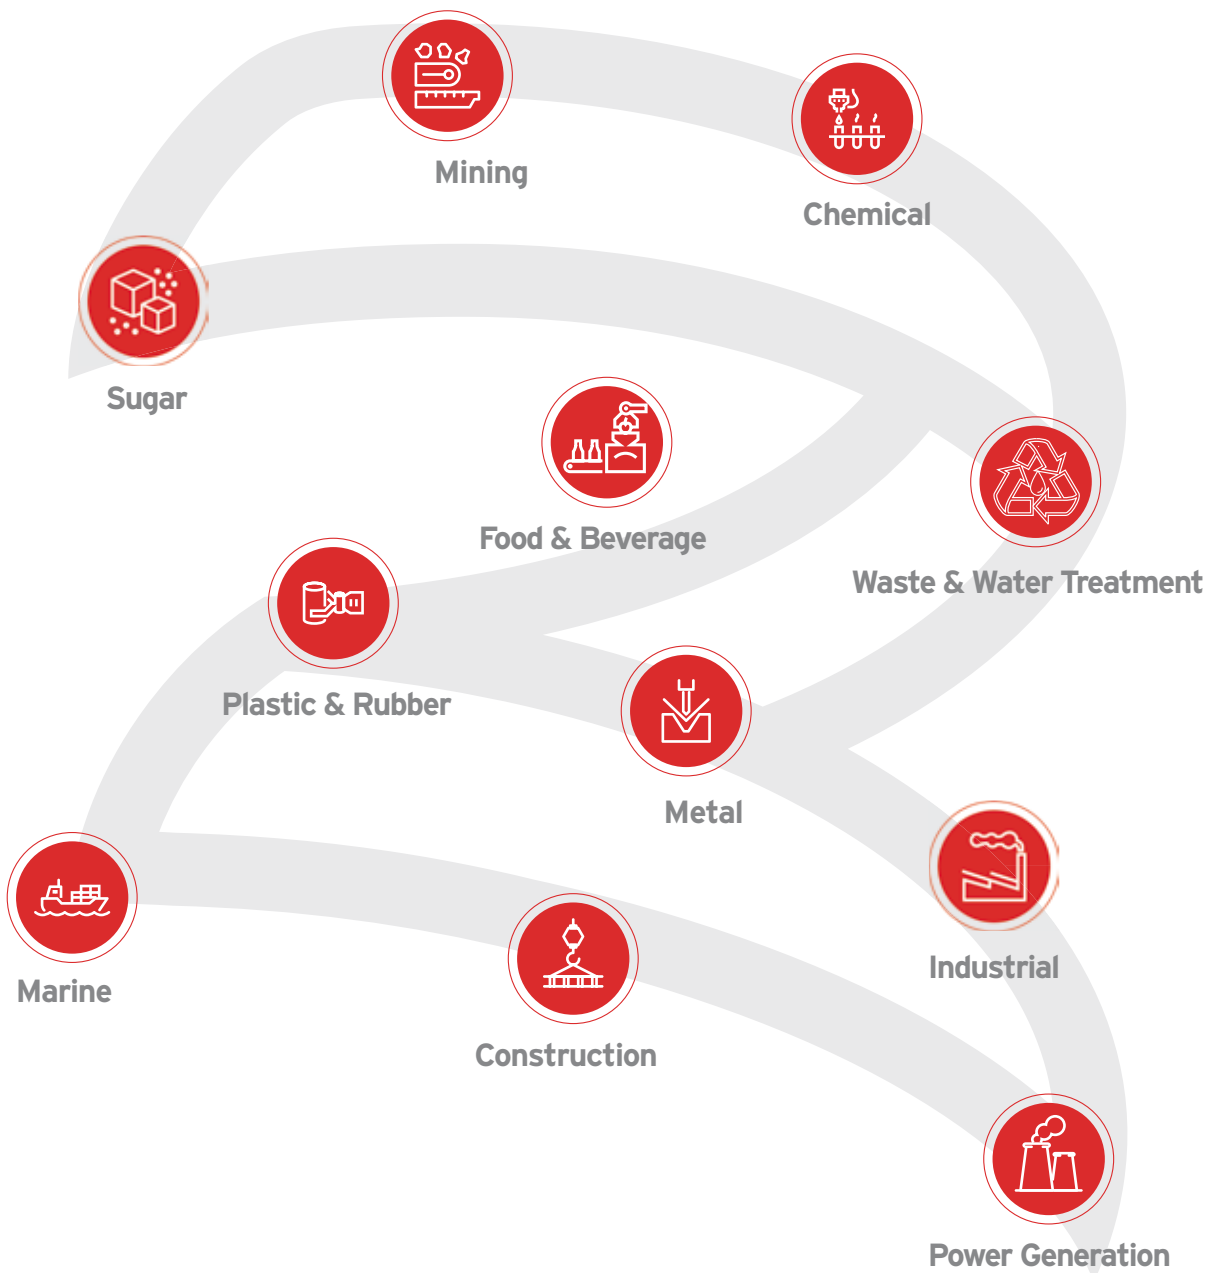



**We deliver
reliable
solutions
worldwide**



Global presence local service



Local support

Sales, customer service,
technical support, spare parts



15 branches*



Worldwide distribution network*

A global network of subsidiaries and dealers. From design and execution to after-sales service. Rossi is always close to you: a local, reliable and flexible partner.

Alongside our 24/7 **Rossi for You** portal you have a suite of digital support tools enabling real time access to your order tracking, invoices, spare part tables download and contact to our service.



United States

Suwanee, GA



Brazil

Cordeiropolis, SP



*All contacts available on www.rossi.com




Headquarters



Branches



Production facilities/Assembly plants

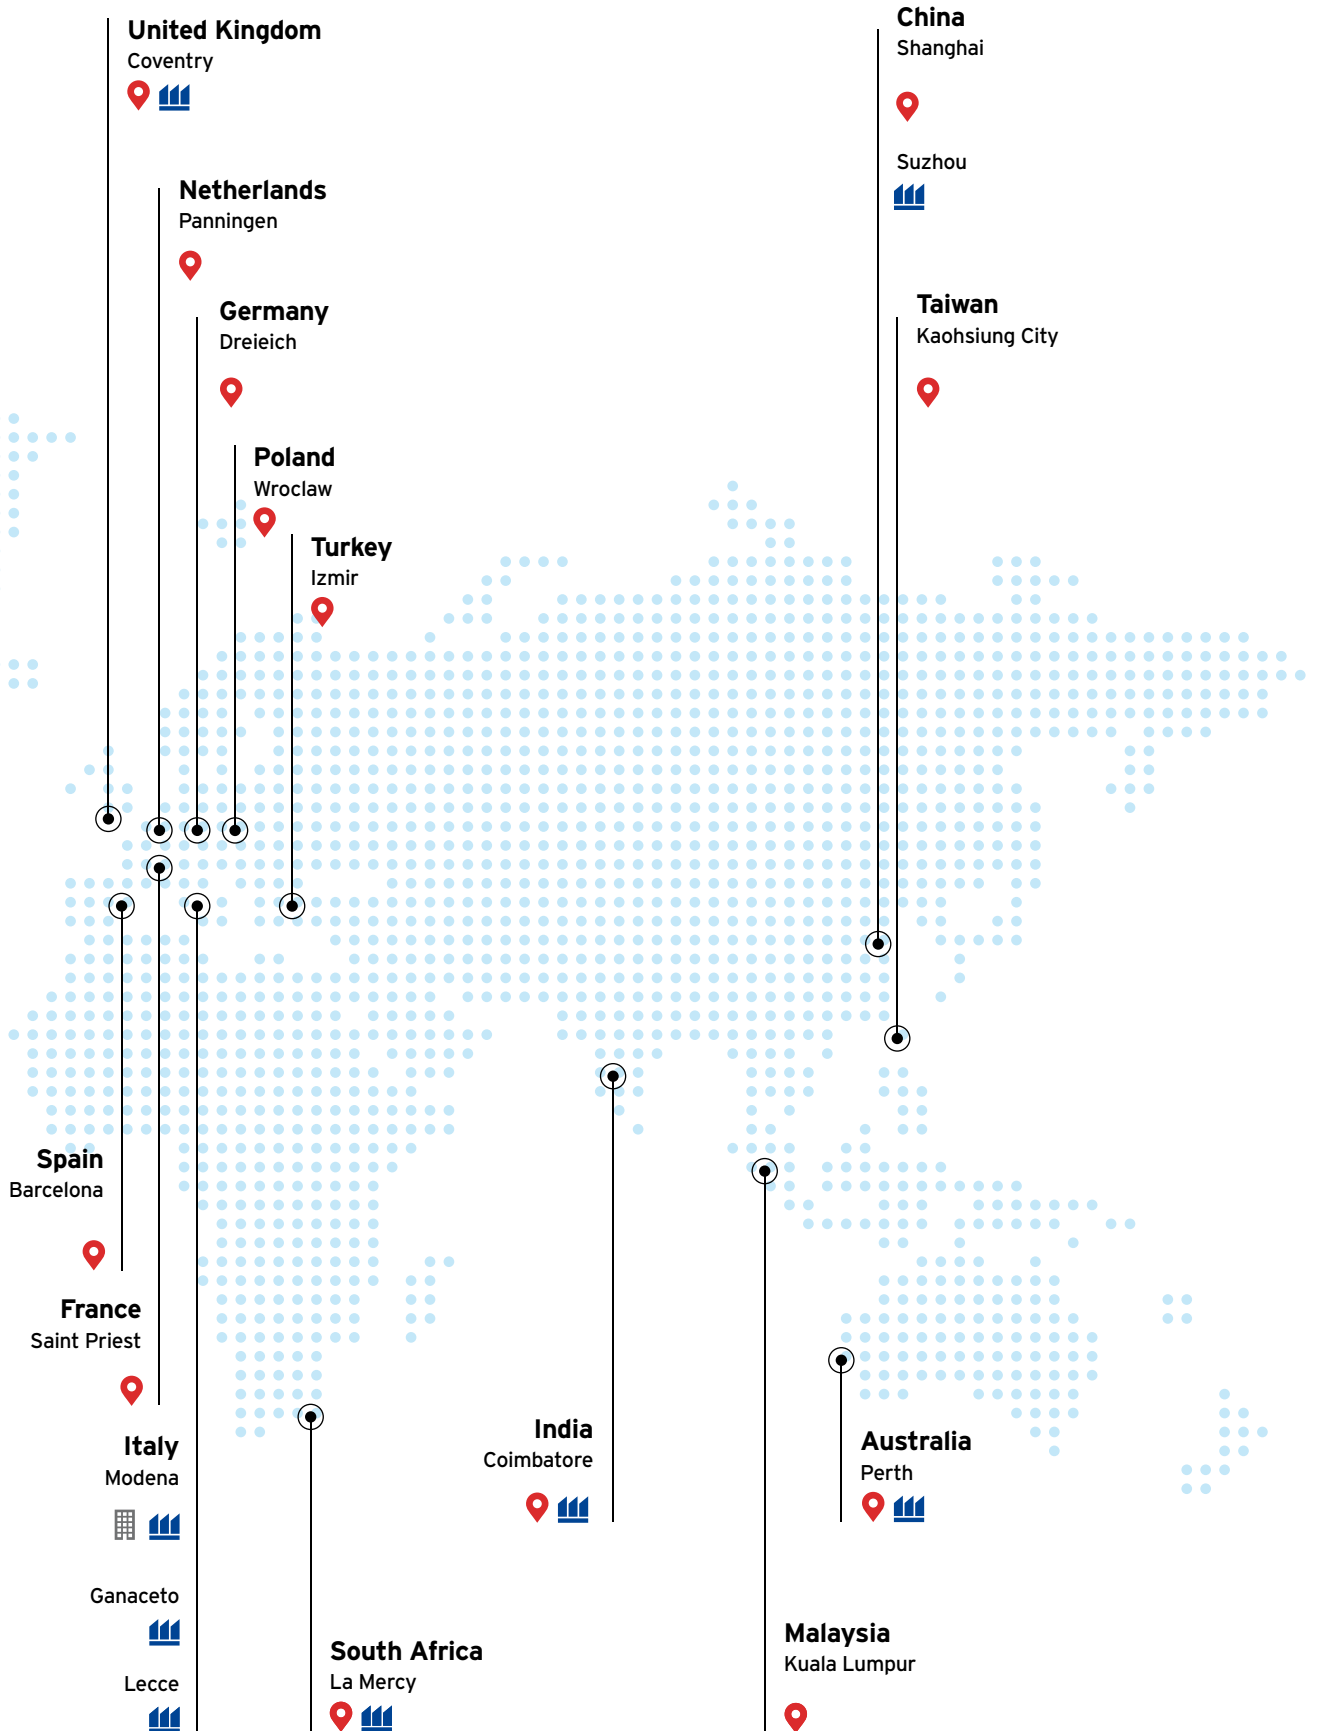

Key figures

 over **1.000** people around the world

 **15** affiliated companies

 **5.000** customers worldwide

 **5** production facilities

 **45** million euros investments in new technologies and methodologies to improve manufacturing efficiency

 **8** assembly plants

 **70** years of experience

After-sale service



Highly trained mechanics and support teams can ensure a fast and efficient after-sale service providing support worldwide.

Digital support



Rossi Drawings, Selector and Download area enable real-time access to your order tracking, invoices, spare part tables download and contact to our service. Fast and easy online access is available 24/7, in 5 languages.

Quality

3 years warranty*




Our drive is to innovate and boost operations by manufacturing performing, precise, reliable and high-quality products all over the world. We are always one step forward in offering and developing solutions that can satisfy an unlimited number of application needs, even in the most demanding conditions.

* As per our warranty terms.



Visit us at
rossi.com

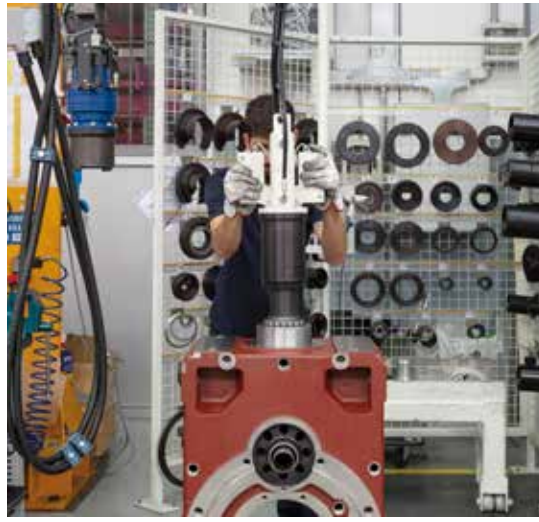

Solutions for
an evolving
industry

Rossi S.p.A.
Via Emilia Ovest 915/A
41123 Modena - Italy

info@rossi.com
www.rossi.com

© Rossi S.p.A. Rossi reserves the right to make any modification whenever to this publication contents.
The information given in this document only contains general descriptions and/or performance features
which may not always specifically reflect those described.

2617.BRO-PRO-23.04-0.EN

